

AD-A083 900


DEFENCE RESEARCH ESTABLISHMENT OTTAWA (ONTARIO)
SIGNAL ANALYSIS USING THE ACOUSTO-OPTIC SPECTRUM ANALYZER.(U)
NOV 79 J P LEE
DREO-TN-80-2

F/G 20/1

UNCLASSIFIED

NL

1 of 1
AD
A083900

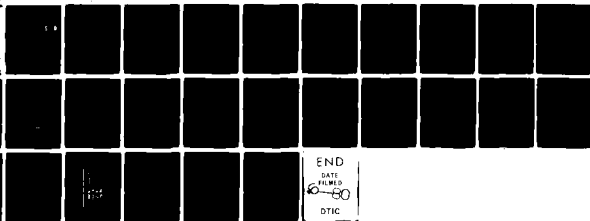

END
DATE
FILMED
DTIC

RESEARCH AND DEVELOPMENT BRANCH

DEPARTMENT OF NATIONAL DEFENCE
CANADA

DEFENCE RESEARCH ESTABLISHMENT OTTAWA

TECHNICAL NOTE NO. 80-2

DTIC
ELECTE
MAY 6 1980

S D

C

14-7N-27-2

6 SIGNAL ANALYSIS USING THE ACOUSTO-OPTIC SPECTRUM ANALYZER

by

1 Jim E.P. Lee

Radar ESM Section
Defence Electronics Division

PROJECT NO.
31800

This document has been approved
for public release and sale; its
distribution is unlimited.

11 NOVEMBER 1979
OTTAWA

404-27-2

Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or special
A	

ABSTRACT

This paper examines the instantaneous, Fourier power spectrum for different types of input signals such as CW, pulse modulated CW and linear FM signals using the acousto-optic spectrum analyzer. The effect on the time-integrated output intensity distribution due to the truncation of the propagating acoustic signal by the finite aperture width of the Bragg cell is also analyzed. Some experimental results on pulse-modulated CW and linear FM signals are presented, and then compared with theory.

RÉSUMÉ

Ce rapport examine la distribution instantanée Fourier du spectre de puissance pour différents types de signaux d'entrés tel que CW, CW avec modulation par pulsations, et modulation F.M. linéaire, utilisant l'analyseur de spectre "Acousto-optic". L'effet sur l'intégration à la sortie de la distribution d'intensité causée principalement par la coupure du signal acoustique par la largeur limitée de l'ouverture de la cellule Bragg est aussi analysé. Quelques résultats expérimentaux sur des signaux à modulation par pulsations et modulation FM linéaire sont présentés et comparés avec la théorie.

TABLE OF CONTENTS

	<u>PAGE</u>
<u>ABSTRACT/RÉSUMÉ</u>	111
<u>TABLE OF CONTENTS</u>	v
<u>ACKNOWLEDGEMENT</u>	vii
1.0 <u>INTRODUCTION</u>	1
2.0 <u>THEORETICAL FORMULATION</u>	1
2.1 <u>CW and Pulse-modulated CW Carriers</u>	4
2.2 <u>Linear FM</u>	4
3.0 <u>EXPERIMENTAL ARRANGEMENT</u>	5
4.0 <u>COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL RESULTS FOR PULSE MODULATED CW SIGNALS</u>	5
TABLE I	14
5.0 <u>COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL RESULTS FOR A 5 μSEC PULSE MODULATED LINEAR FM SIGNAL</u> ...	14
TABLE II	18
6.0 <u>CONCLUSIONS</u>	21
7.0 <u>REFERENCES</u>	22
APPENDIX A	23
Figure 1 SCHEMATIC DIAGRAM OF ACOUSTO-OPTIC SPECTRUM ANALYZER	2
Figure 2 LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μ SEC PULSE MODULATED CW AT TWO DIFFERENT INSTANTS OF TIME ($\alpha = 0.5$ NEPERS/5 μ SEC, $T = 1$, AND $D = 20.5$ mm, CW = 150 MHZ)	6
Figure 3 LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μ SEC PULSE MODULATED CW AT TWO DIFFERENT INSTANTS OF TIME	7
Figure 4 INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR BOTH CW AND A 5 μ SEC PULSE MODULATED CW. (INTEGRATION TIME = 10 μ SEC, $\alpha = 0.5$ NEPERS/5 μ SEC, $T = 1$, CW = 150 MHZ AND $D = 20.5$ mm)	9

TABLE OF CONTENTS (CONTINUED)

	<u>PAGE</u>
Figure 5 INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE DETECTED BY PHOTO DETECTOR ARRAY (CELL TO CELL CENTRE SPACING = 13 μ m, INTEGRATION TIME = 50 μ SEC)	10
Figure 6 INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR BOTH CW AND A 1 μ SEC PULSE MODULATED CW. (INTEGRATION TIME = 6 μ SEC, CW = 150 MHZ, α = 0.5 NEPERS/5 μ SEC, T = 1 AND D = 20.5 mm)	11
Figure 7 INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR BOTH CW AND A 2 μ SEC PULSE MODULATED CW. (INTEGRATION TIME = 7 μ SEC, CW = 150 MHZ)	12
Figure 8 INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE DETECTED BY PHOTO DETECTOR ARRAY (CELL TO CELL CENTRE SPACING = 13 μ m, INTEGRATION TIME = 50 μ SEC)	13
Figure 9 LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μ SEC PULSE MODULATED LINEAR FM AT TWO DIFFERENT INSTANTS OF TIME (f_o = 150 MHZ, Δf = 2 MHZ)	15
Figure 10 LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μ SEC PULSE MODULATED LINEAR FM AT TWO DIFFERENT INSTANTS OF TIME	16
Figure 11 INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μ SEC PULSE MODULATED LINEAR FM. (INTEGRATION TIME = 10 μ SEC, f_o = 150 MHZ, Δf = 2 MHZ, α = 0.5 NEPERS/5 μ SEC, T = 1, AND D = 20.5 mm)	17
Figure 12 ENLARGED, INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE SHOWING THE MAIN LOBE STRUCTURES OF A 5 μ SEC PULSE MODULATED LINEAR FM.....	19
Figure 13 INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE OF A 5 μ SEC PULSE MODULATED LINEAR FM DETECTED BY PHOTO DETECTOR ARRAY (CELL TO CELL CENTRE SPACING = 13 μ m, INTEGRATION TIME = 50 μ SEC)	20

ACKNOWLEDGEMENT

The author wishes to express his thanks to G. Rumbold for his stimulating discussions throughout the work. I would also like to thank L. Rowlandson for reviewing the paper with many valuable suggestions.

INTRODUCTION

Spectrum analysis using acousto-optic diffraction is well known for its inherent capability of wideband spectrum analysis on a real-time basis with many simultaneous signals present. The diffraction of a plane wave, monochromatic, light beam by a single acoustic signal is well understood and analyzed by W.R. Klein and B.D. Cook (1967) and R. Adler (1967). A coupled mode formulation is developed by Hecht (1977) for the analysis of acousto-optic diffraction with multiple acoustic waves at different carrier frequencies. A review covering the real-time optical Fourier spectrum analysis on topics such as weighting functions, frequency resolution and side lobe level is also given by Hecht (1977). For small signal analysis, the acoustic signal can be modelled as a travelling wave phase grating as presented by M. King (1967) and W.T. Maloney (1969). The emerging light phase front is diffracted in passing through the modulator which produces an additional quadrature component of the optical carrier amplitude modulated by the acoustic signal.

In this paper the instantaneous, light intensity distribution in the frequency plane is computed for different types of input signals using the travelling wave phase-grating model in the Bragg regime. Time-integrated output intensity distributions are also plotted for pulse-modulated CW signals with different pulse-widths and a linear FM. They are then compared with experimental values.

2.0 THEORETICAL FORMULATION

The schematic diagram of the acousto-optic spectrum analyzer is shown in Figure 1, with a collimated light wave impinging on the Bragg cell at the Bragg angle θ_B . Assuming the Fourier transform lens is ideal, the diffracted field distribution in the frequency plane in one dimension is approximately given by:

$$U_1(y_1, t) = AE_0 \exp \left[-j2\pi\nu \left(t - \frac{2F}{c} \right) \right] \frac{P}{\lambda F} .$$

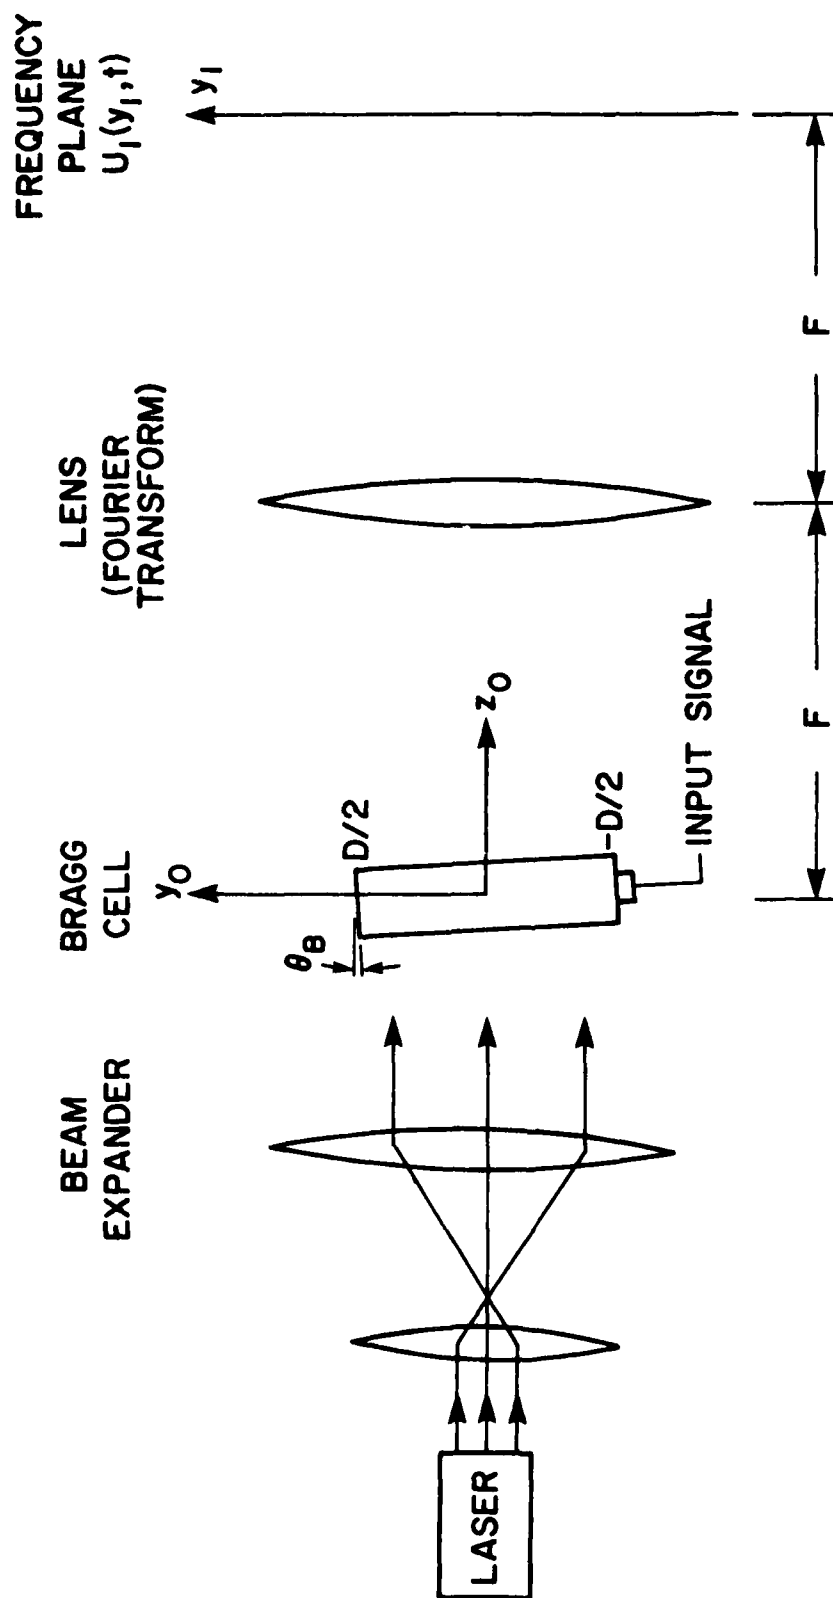


FIGURE 1 - SCHEMATIC DIAGRAM OF ACOUSTO-OPTIC SPECTRUM ANALYZER

$$\int_{-D/2}^{D/2} g(y_0 \cos \theta_B - v_s t) w(y_0) \exp \left[-j \frac{2\pi}{\lambda F} (y_1 y_0) \right] dy_0 \quad (1)$$

where:

$$g(y_0 \cos \theta_B - v_s t) \approx g(y_0 - v_s t), \text{ for } \theta_B \ll 1$$

is the normalized travelling acoustic signal wave

P = height of Bragg cell aperture

A = a collection of constants including the elasto optic diffraction efficiency

v_s = acoustic wave velocity

λ = c/v is the optical wavelength

The amplitude weighting window function $[w(y_0)]$ which includes the truncated Gaussian beam profile and the acoustic attenuation is given by:

$$w(y_0) = \exp \left[-\alpha(f) \tau \left(\frac{y_0}{D} + \frac{1}{2} \right) - (2T \frac{y_0}{D})^2 \right] \quad (2)$$

Where T specifies the truncated Gaussian beam profile, α is the acoustic loss coefficient in nepers/sec and τ is the acoustic transit time across the aperture.

Equation (1) can be rewritten as a convolution of the spatial Fourier transform of the input signal and the Fourier transform of the amplitude weighting function as follows:

$$U_1(y_1, t) = AE_0 \exp \left[-j2\pi v(t - \frac{2F}{c}) \right] \frac{P}{\lambda F} .$$

$$\int_{-\infty}^{\infty} G(f/v_s) W\left(\frac{y_1}{\lambda F} - f/v_s\right) d(f/v_s) \quad (3)$$

where

$$G(f/v_s) = \int_{-D/2}^{D/2} g(y_0 - v_s t) \exp[-j2\pi f y_0/v_s] dy_0 \quad (4)$$

$$W\left(\frac{y_1}{\lambda F} - f/v_s\right) = \int_{-D/2}^{D/2} w(y_0) \exp[-j2\pi y_0 \left(\frac{y_1}{\lambda F} - f/v_s\right)] dy_0 \quad (5)$$

2.1 CW and Pulse-modulated CW Carriers

Both types of signals are characterized by a constant carrier and are expressed by

$$g(y_0 - v_s t) = \text{Re} \left\{ A(y_0 - v_s t) \exp[j2\pi f/v_s (y_0 - v_s t)] \right\}$$

where $A(y_0 - v_s t)$ is the amplitude function of the signal

2.2 Linear FM

A linear FM can be expressed by

$$g(y_0 - v_s t) = \text{Re} \left\{ [A(y_0 - v_s t)] \exp \left\{ j2\pi \left[\frac{f}{v_s} (y_0 - v_s t) + \frac{k}{2} \frac{1}{v_s^2} (y_0 - v_s t)^2 \right] \right\} \right\}$$

where f_0 is the centre frequency and k is the rate of change of frequency in (HZ/sec).

3.0 EXPERIMENTAL ARRANGEMENT

The schematic arrangement of the experimental acousto-optic spectrum analyzer is shown in Figure 1. The optical source is the Spectra Physics Model 124B helium neon laser which delivers 15 mw of coherent optical power at 0.6328 μm . The laser beam is expanded in one dimension by the beam expander to a width of 20.5 mm with a Gaussian intensity profile truncated at $1/e^2$ points. The bulk Bragg cell used is the FJW D-150 Acousto-optic deflector with the Zenith phased array transducer giving a bandwidth of about 100 MHz at a centre frequency of 150 MHz. The aperture dimensions used in the experimental measurements are 2 mm by 20.5 mm with a corresponding transit time of 5 μsec . The acoustic loss coefficient is measured to be 0.5 nepers/5 μsec at the centre-frequency. A thin circular Achromat lens of diameter 50.8 mm with a focal length of 0.4 m is used to Fourier transform the weighted signal as it forms the far-field intensity distribution in its back focal plane. The lens was tested and found to produce negligible phase error for low spatial frequencies. The output intensity distribution is detected and integrated on the Fairchild CCD 110/110F linear image sensor with 256 elements. The cell size is 13 μm by 17 μm on 13 μm centers with a channel stop width of 5 μm . The information stored in the elements are clocked out serially by CCD shift registers and displayed on an oscilloscope.

4.0 COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL RESULTS FOR PULSE MODULATED CW SIGNALS

Using eq. (1), the envelopes of the instantaneous power spectra for a 5 μsec pulse modulated CW at 150 MHz are plotted in Figures 2 and 3. They are plotted at different instants of time as the pulse propagates across the Bragg cell. The acoustic signal is attenuated and illuminated by different portions of the Gaussian profile on its course through the aperture. The effect of the amplitude weighting function is to broaden the main lobe, suppressing the side-lobe levels and filling up the nulls. Shown in Figure 2 are the two plots of the instantaneous power spectra; one with the signal completely coincident with the aperture and the other one with a quarter of the pulse interacting. As can be seen from the graph, the truncation of the signal by the finite aperture causes the frequency components to spread out with a corresponding drop in power. The instantaneous spectrum at another instant of time with half of the pulse interacting is shown in Figure 3. A listing of the computer program is given in Appendix A.

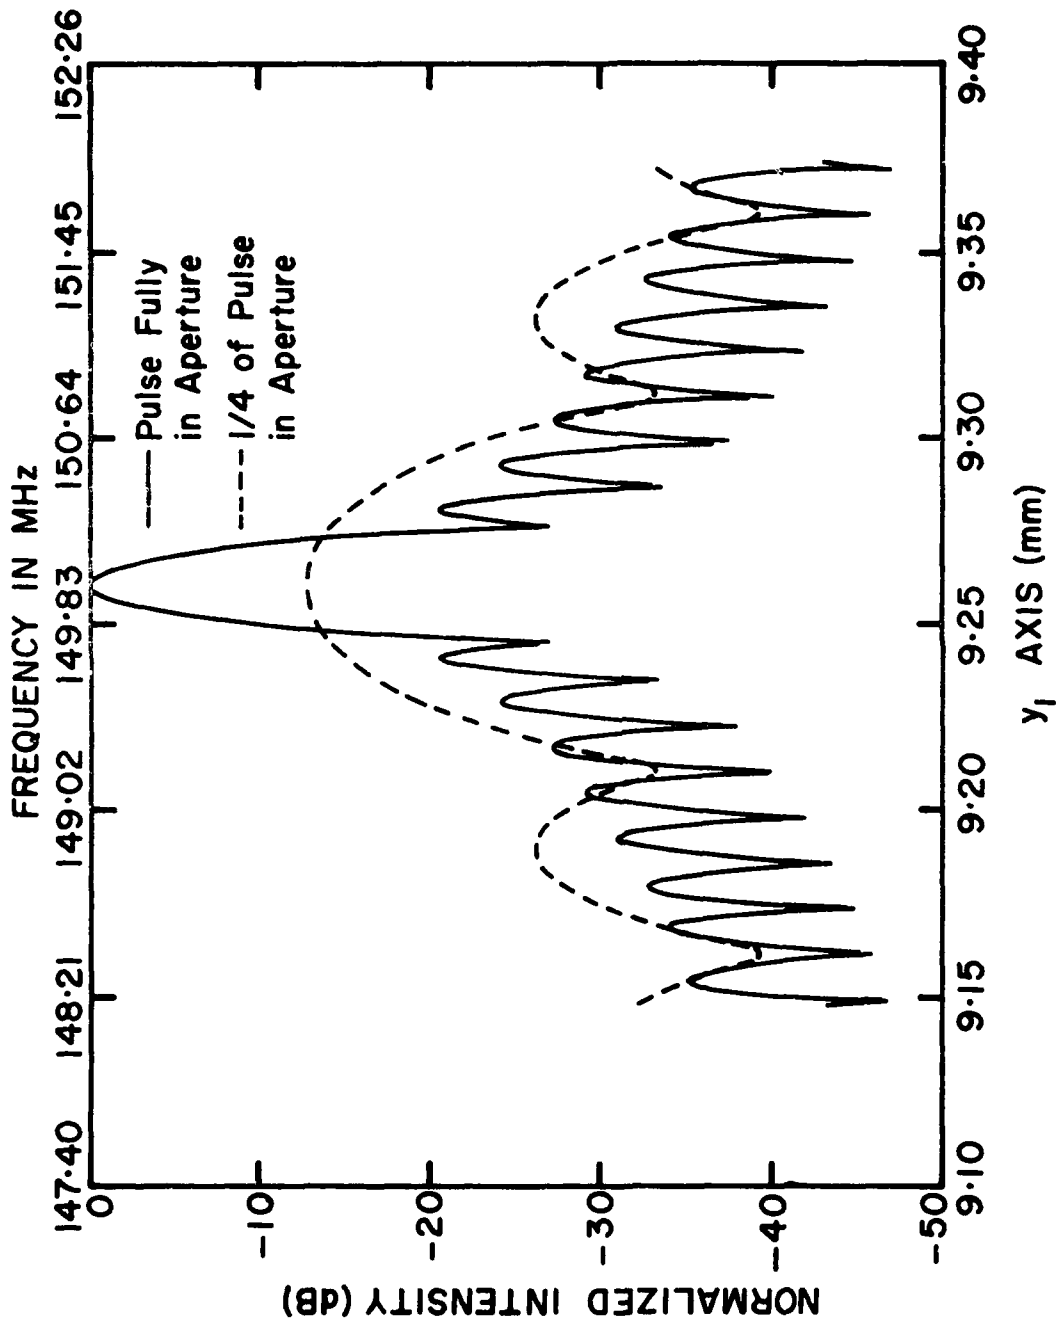


Figure 2 - LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μ SEC PULSE MODULATED CW AT TWO DIFFERENT INSTANTS OF TIME ($\alpha = 3.5$ NEPERS/5 μ SEC, $T = 1$, AND $D = 33.5$ mm, $CW = 150$ MHz)

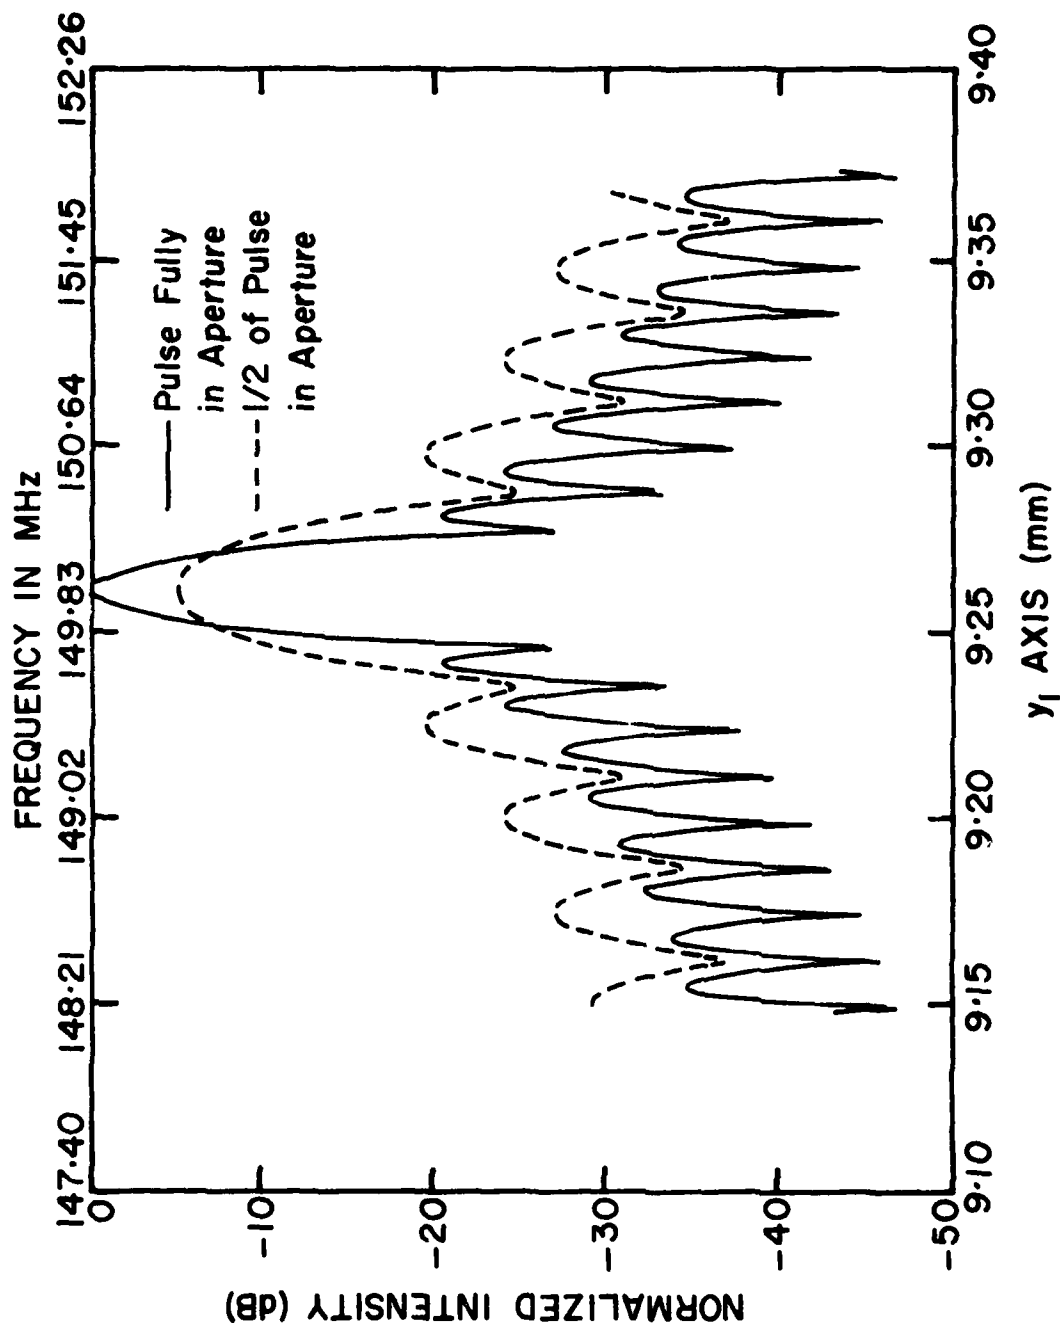


Figure 3 - LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μ SEC PULSE MODULATED CW AT TWO DIFFERENT INSTANTS OF TIME

Summing up all the spectra at different instants of time, an integrated power spectrum is obtained and shown in Figure 4. The total integration time is 10 μ sec which is the time interval for the pulse to transit the aperture. Figure 4 also shows the spectrum of a CW signal integrated for the same interval of time, or equivalently, it is the spectrum of a stationary 5 μ sec-pulse filling up the aperture and time integrated for 10 μ sec. By comparing the two plots, the effect due to the truncation of the signal by the finite aperture is to broaden the main lobe and to smooth out the side lobes. The two output waveforms are also measured experimentally and shown in Figures 5(a) and 5(b). Identical photo-cells are used in recording the two waveforms in order to minimize the effect of cell response variations. As can be seen from the figures, there is a definite spread in the main lobe due to the truncating effect. No attempt is made here to compare the theoretical and experimental results in detail because the width of the power spectrum is comparable to the size of a photo-cell and the cell to cell boundary structure introduces distortion.

Theoretical results are plotted in Figures 6 and 7 for a 1 μ sec and 2 μ sec pulse modulated carriers along with the corresponding experimental measurements shown in Figures 8(a) and 8(b). For these two cases, the main lobe covers a number of cells and the error introduced by the structure of the cell boundary becomes less important. The light intensity distribution is graphically integrated with a cell width of 13 μ m and the results are tabulated in Table I along with the experimental values. Some of the possible sources of error in the measurement system are as follows:

- a) The lenses used in the beam expander and the Fourier transform are not ideal.
- b) There is error introduced by representing the beam profile with an ideal truncated Gaussian distribution.
- c) There is error due to the cell-to-cell boundary structure and the photo response non-uniformity of the cells.

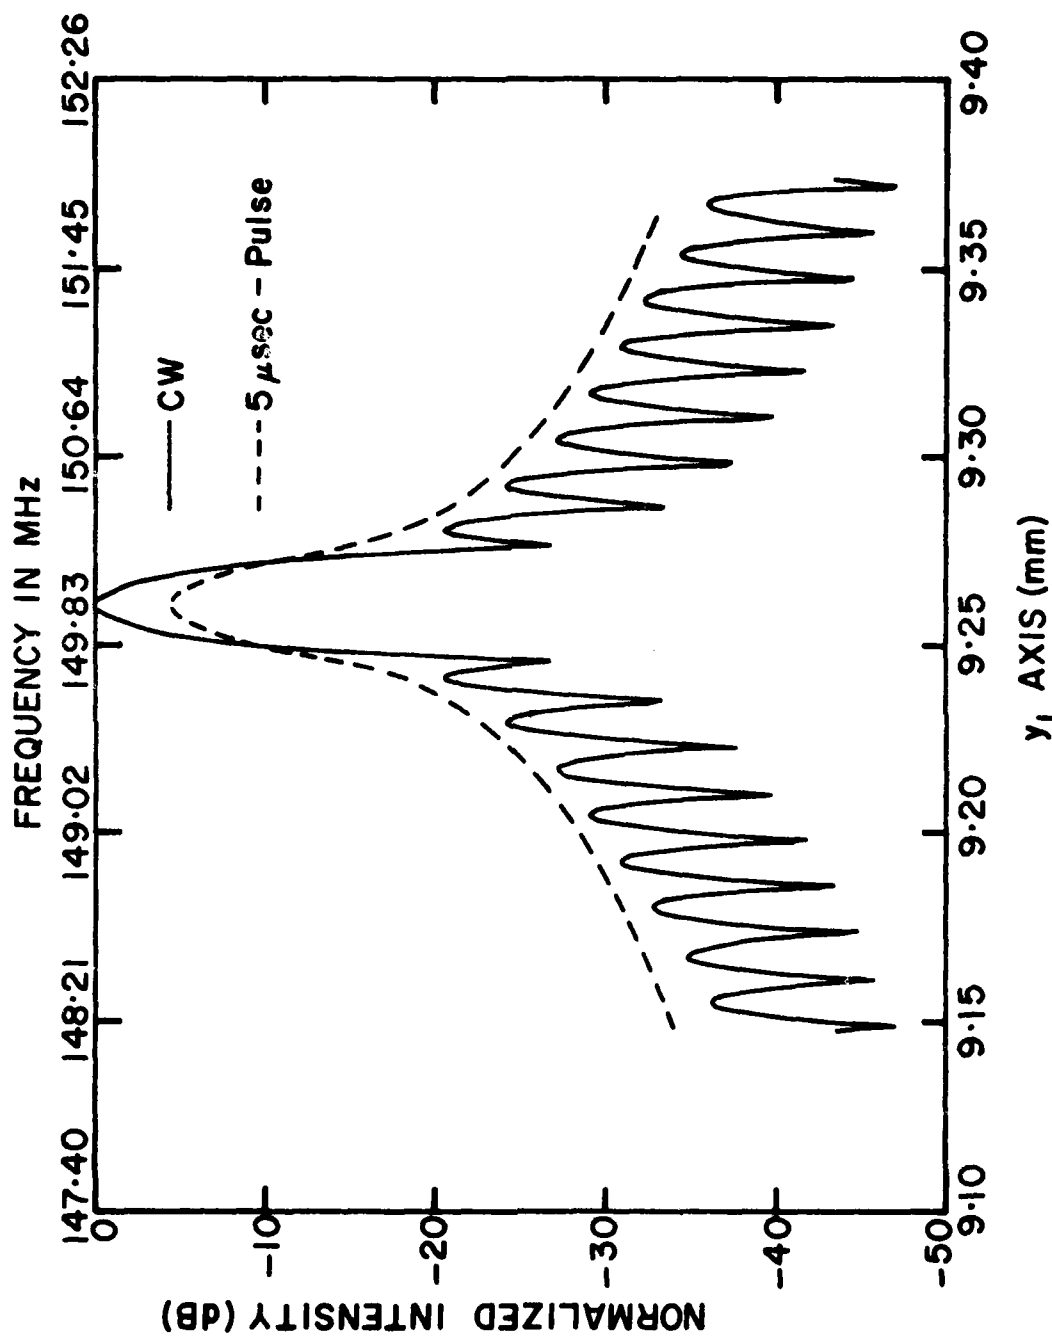


Figure 4 - INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR BOTH CW AND A 5 μSEC PULSE MODULATED CW. (INTEGRATION TIME = 10 μSEC, $\alpha = 0.5$ NEPERS/5 μSEC, $T = 1$, CW = 150 MHz AND $D = 20.5$ mm)

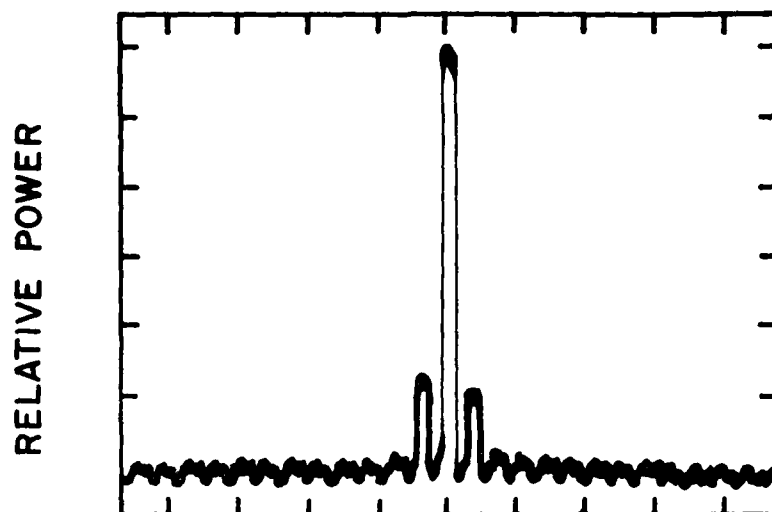


Figure 5(a) - CW

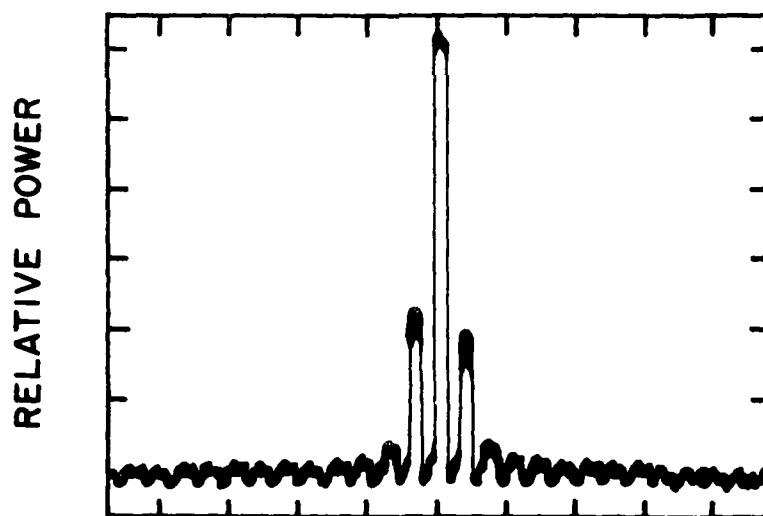


Figure 5 (b) - 5 μ SEC - PULSE

Figure 5 - INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE DETECTED BY PHOTO DETECTOR ARRAY (CELL TO CELL CENTER SPACING = 13 μ m, INTEGRATION TIME = 50 μ SEC)

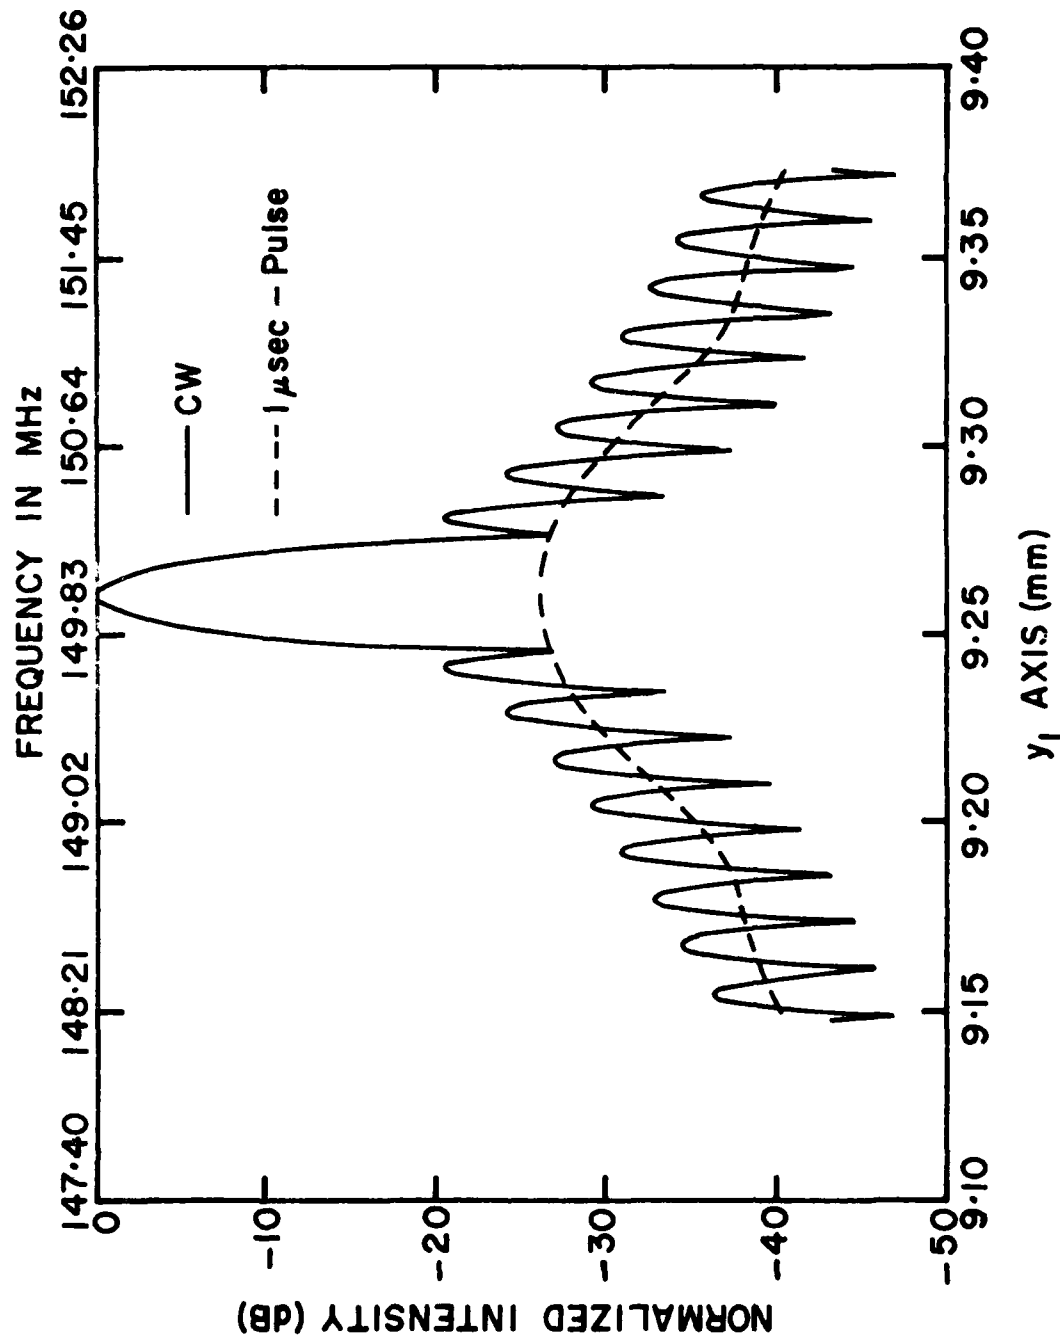


Figure 6 - INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE
FOR BOTH CW AND A 1 μSEC PULSE MODULATED CW. (INTEGRATION TIME =
6 μSEC, CW = 150 MHz, $\alpha = 0.5$ NFPER/μSEC, $T = 1$ AND $D = 20.5$ mm.)

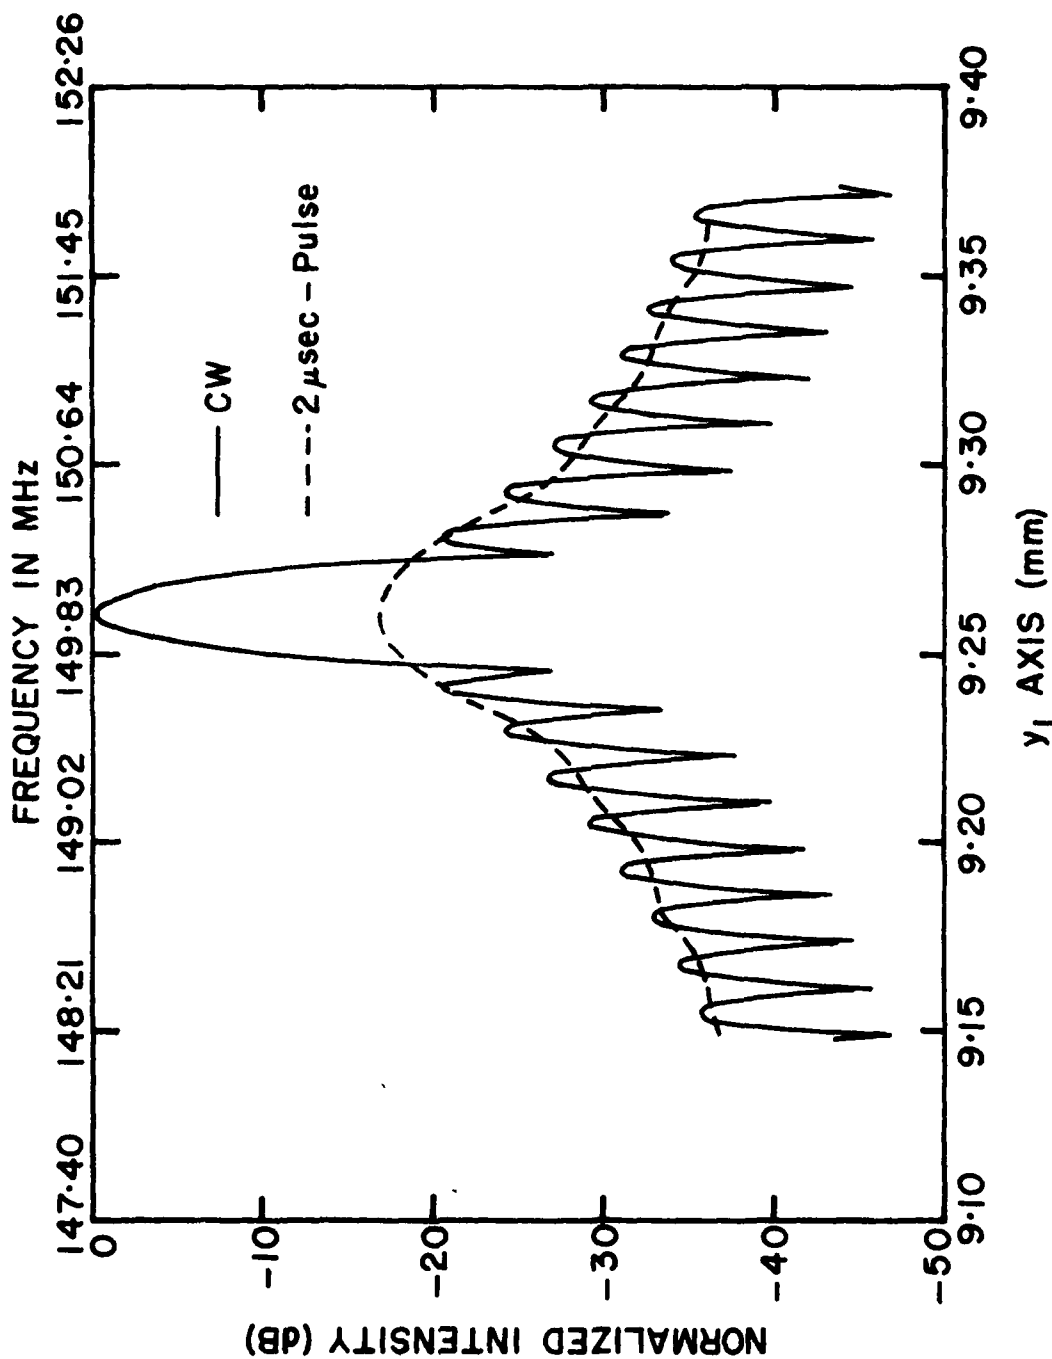


Figure 7 - INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR BOTH CW AND 2 μsec PULSE MODULATED CW. (INTEGRATION TIME = 7 μsec, CW = 150 MHz)

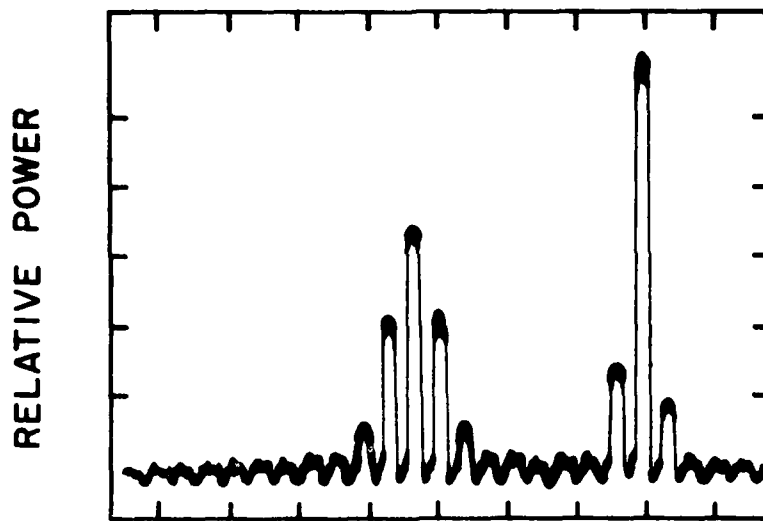


Figure 8 (a) - CW AND 2 μ SEC PULSE MODULATED CW

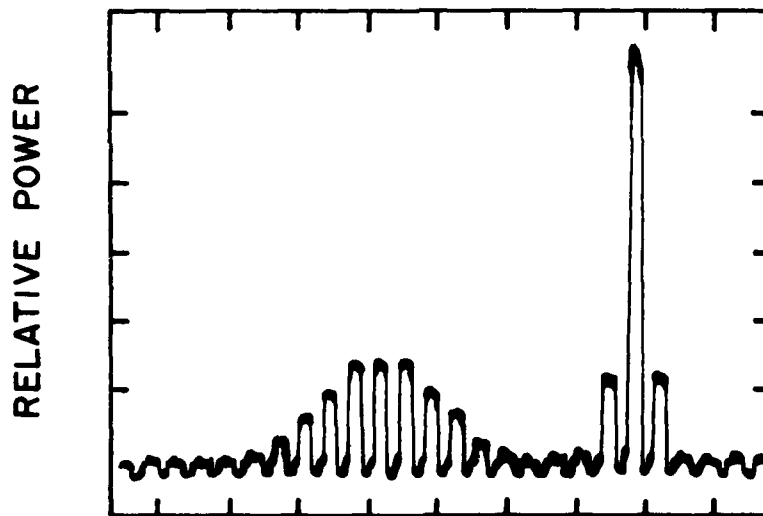


Figure 8 (b) - CW AND 1 μ SEC PULSE MODULATED CW

Figure 8 - INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE
FREQUENCY PLANE DETECTED BY PHOTO DETECTOR ARRAY
(CELL TO CELL CENTRE SPACING = 13 μ m, INTEGRATION
TIME = 50 μ SEC)

TABLE I

COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL INTEGRATED INTENSITY
DISTRIBUTION FOR A 1 μ SEC AND 2 μ SEC PULSE MODULATED CW SIGNAL

PULSE-WIDTH IN μ SEC	1- μ SEC CW = 150 MHZ		2- μ SEC CW = 150 MHZ	
	Theoretical Intensity	Experimental Intensity	Theoretical Intensity	Experimental Intensity
CENTRE CELL (Normalized to Unity)	1	1	1	1
1st Cell from Centre	0.87	0.875	0.70	0.61
2nd	0.64	0.60	0.21	0.15
3rd	0.36	0.4		
4th	0.17	0.13		

The experimental results shown in Figures 8(a) and 8(b) agree reasonably well with the theoretical calculations if the sources of error are taken into account.

5.0 COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL RESULTS FOR A 5 μ SEC PULSE MODULATED LINEAR FM SIGNAL

Using eqs. (1) and (7), the instantaneous power spectra of a linear FM signal are plotted in Figures 9 and 10 for different instances of time. The duration of the signal is 5 μ sec with a centre frequency of 150 MHz and a frequency excursion of 2 MHz. The theoretical time-integrated power spectrum is plotted in Figure 11 and the power spectrum of the same signal, but stationary in the aperture and time-integrated for the same

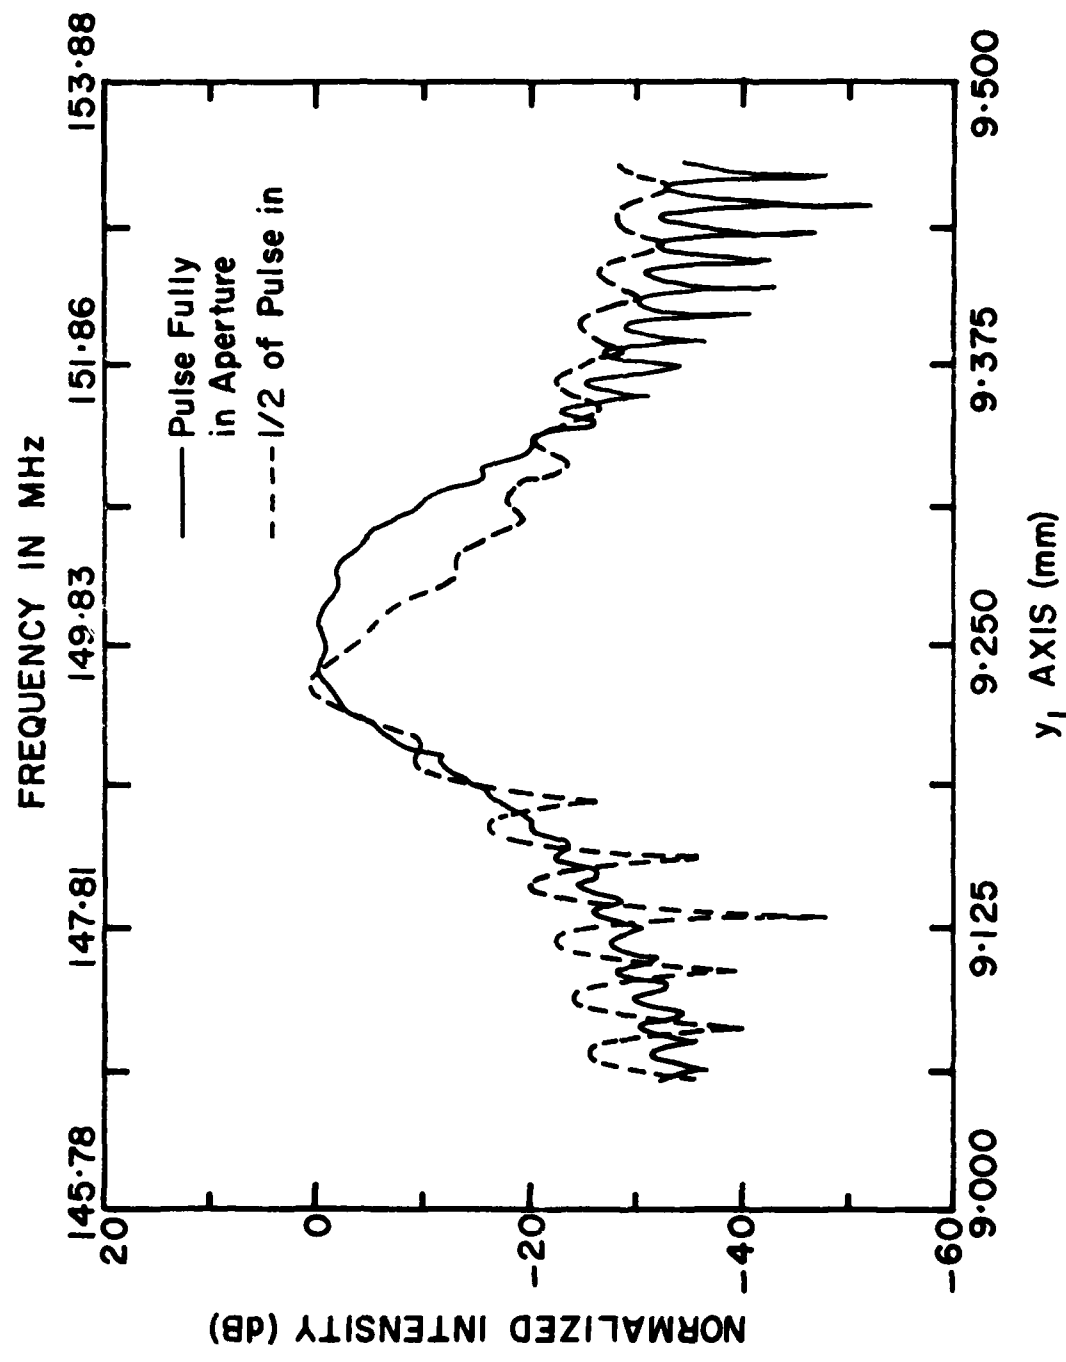


Figure 9 - LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μ SEC PULSE MODULATED LINEAR FM AT TWO DIFFERENT INSTANTS OF TIME ($f_o = 150$ MHz, $\Delta f = 2$ MHz)

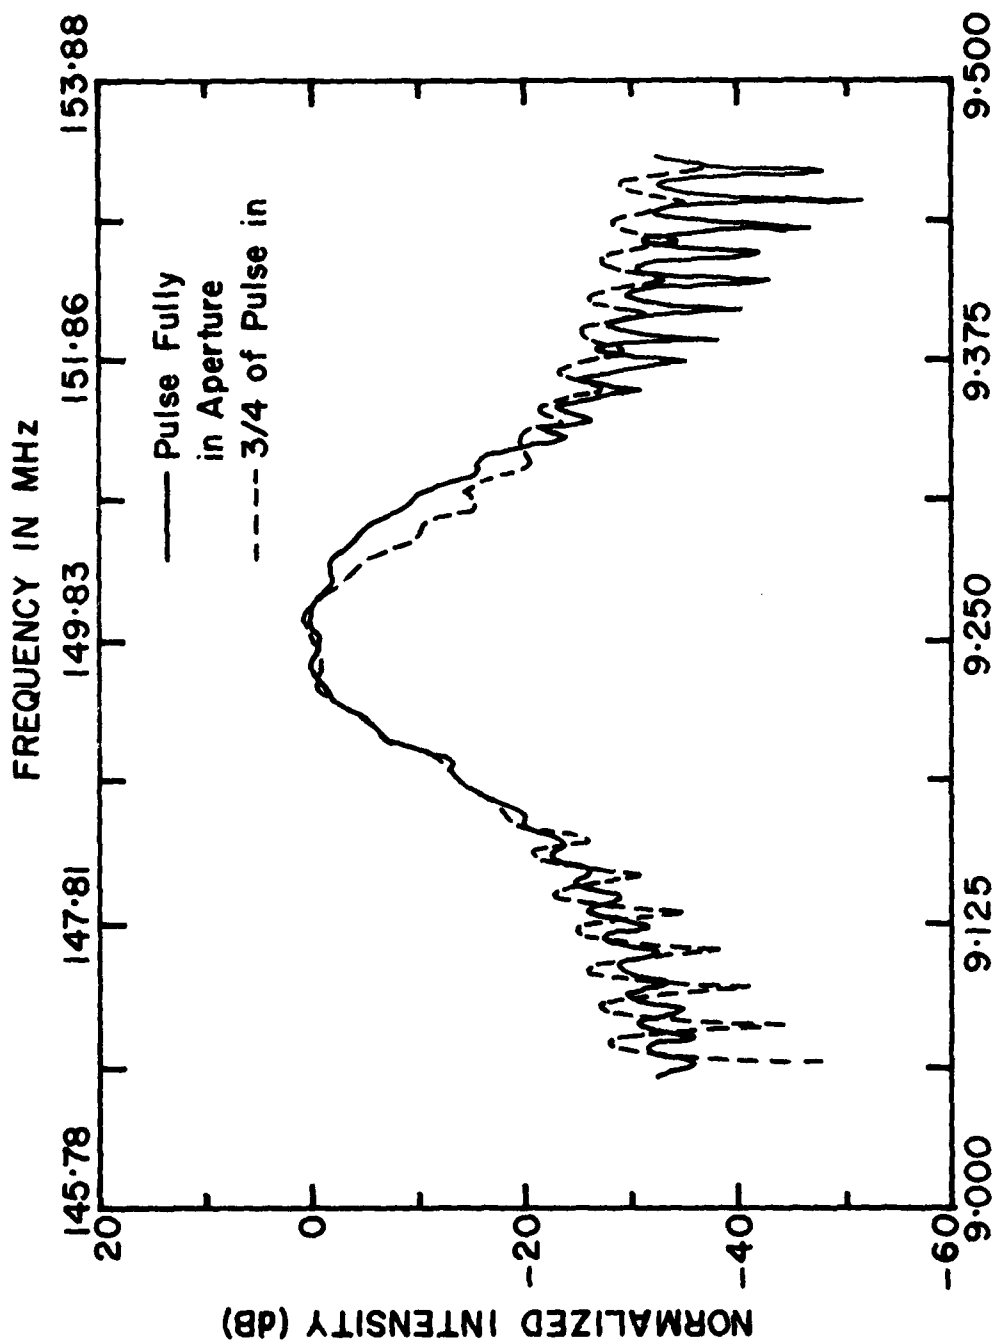


Figure 10 - LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μSEC PULSE MODULATED LINEAR FM AT TWO DIFFERENT INSTANTS OF TIME

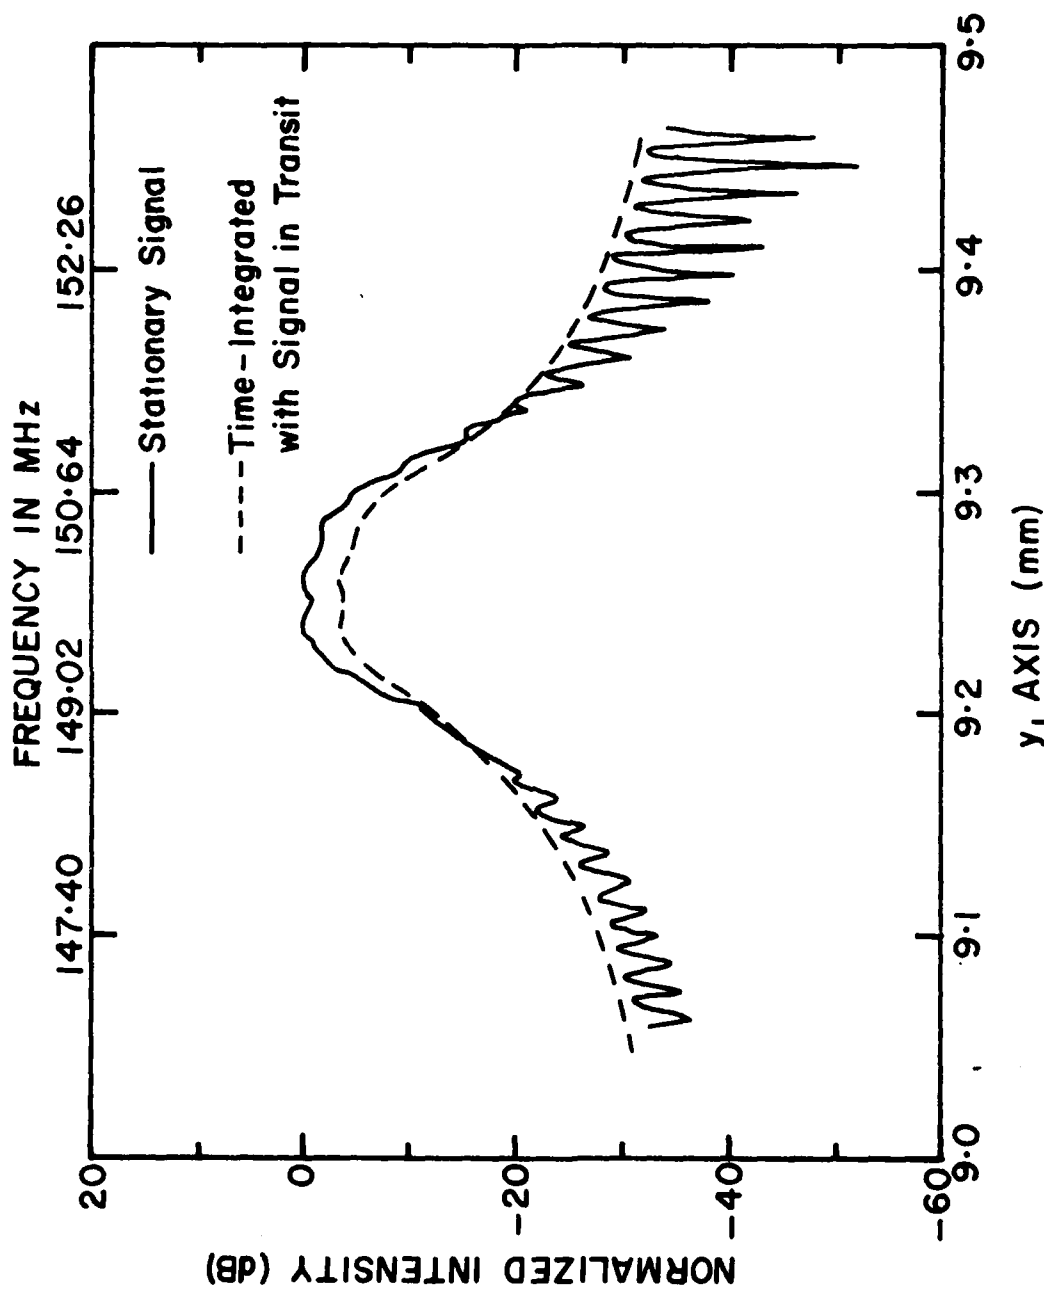


Figure 11 - INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE FOR A 5 μ SEC PULSE MODULATED LINEAR FM. (INTEGRATION TIME = 10 μ SEC, $F_0 = 150$ MHz, $\Delta f = 2$ MHz, $\alpha = 0.1$ HERTZ/5 μ SEC, $T = 1$, AND $D = 20.5$ mm)

interval of time, is also plotted for comparison. An enlarged plot showing the main lobe structures is given in Figure 12. As expected, there is a spread in frequency and smoothing of the side lobes for the time-integrated output due to the truncation of the signal by the finite aperture width. The experimental output power spectrum is also measured and shown in Figure 13. Some comparisons between the experimental and theoretical values are tabulated in Table II. The theoretical power spectrum is graphically integrated with a cell width of 13 μ m and again they agree reasonably well.

TABLE II

COMPARISON BETWEEN THEORETICAL AND EXPERIMENTAL
INTEGRATED INTENSITY DISTRIBUTION FOR THE LINEAR FM SIGNAL

LINEAR FM PULSE WIDTH = 5 μ SEC f_0 = 150 MHZ Δf = 2 MHZ	THEORETICAL INTENSITY	EXPERIMENTAL INTENSITY
CENTRE CELL (at 150 MHZ, Normalized to Unity)	1	1
1st Cell on Right of Centre Cell	0.78	0.79
2nd	0.62	0.33
3rd	0.32	0.10
1st Cell on Left of Centre Cell	0.93	0.85
2nd	0.95	0.87
3rd	0.59	0.77
4th	0.29	0.43

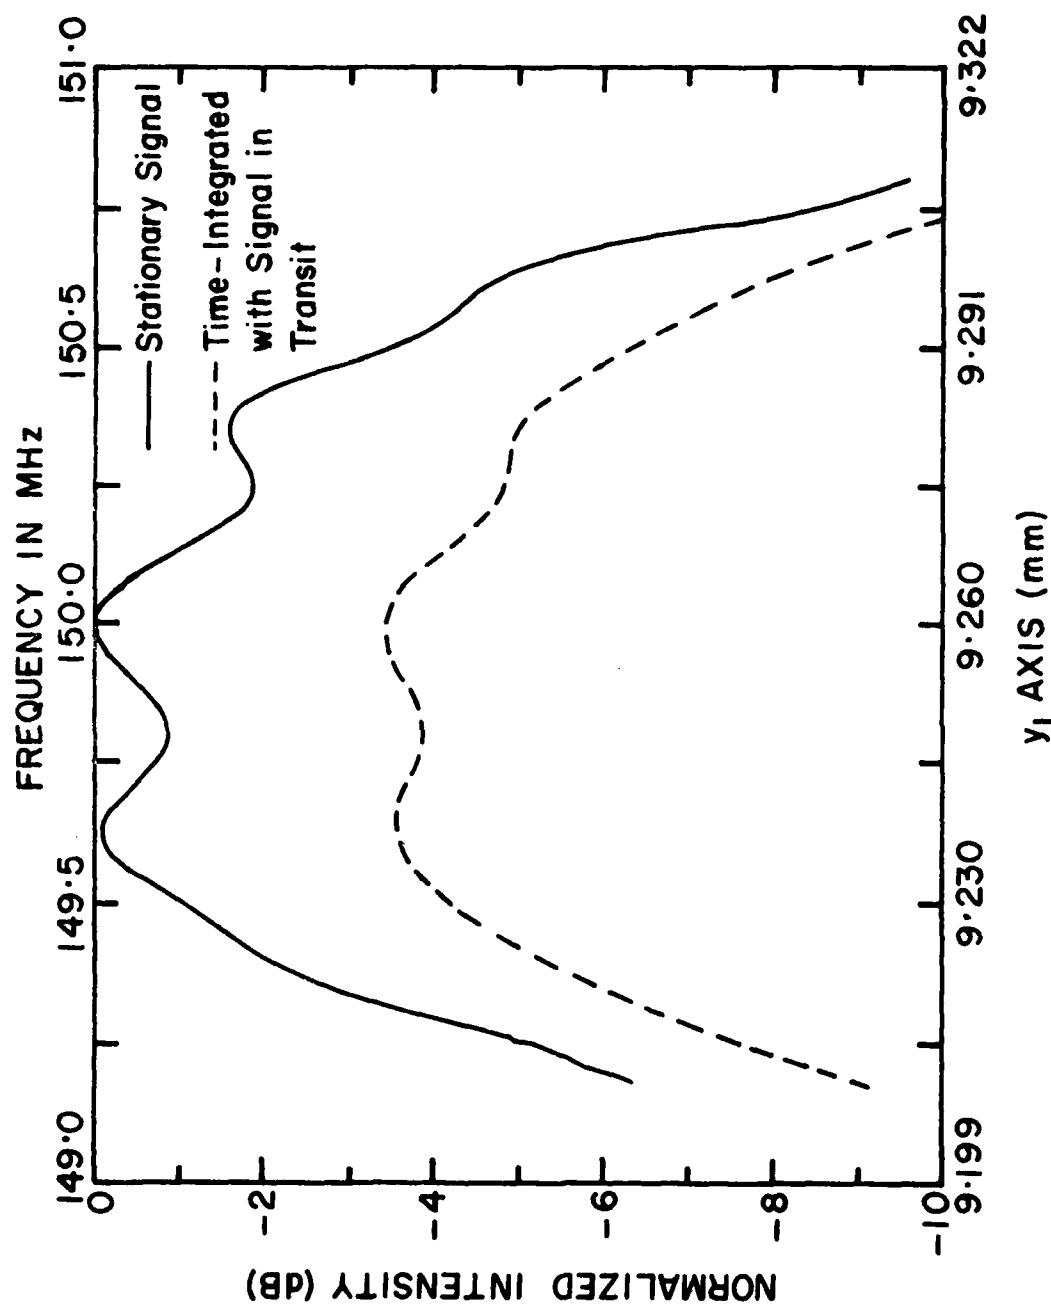


Figure 12 - ENLARGED, INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE SHOWING THE MAIN LORE STRUCTURE OF A 5 μ SEC PULSE MOVING IN LINEAR TIME

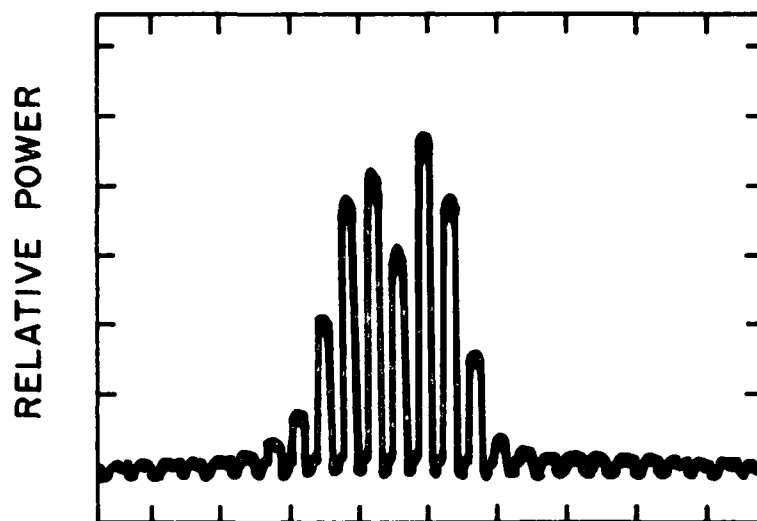


Figure 13 - INTEGRATED LIGHT INTENSITY DISTRIBUTION IN THE FREQUENCY PLANE OF A 5 μ SEC PULSE MODULATED LINEAR FM DETECTED BY PHOTO DETECTOR ARRAY (CELL TO CELL CENTRE SPACING = 13 μ m, INTEGRATION TIME = 50 μ SEC)

6.0 CONCLUSIONS

In general, the experimental results agree well with theory for pulse modulated CW and linear FM signals. The effect on the integrated output due to the truncation of the signal by the finite aperture is to broaden the main lobe and smooth out the side lobes.

The theoretical and experimental results for linear FM signals show that there is considerable broadening of the spectra due to the fact that the frequency is modulated. The important point is that the power spectra of this type of signal is reproduced even though the spatial structure of the acoustic signal in the Bragg cell is now complex.

The combination of theoretical and experimental results available at this time indicate that the acousto-optic receiver can be used to give an accurate and instantaneous description of the power spectrum of several types of signals commonly encountered in ESM applications.

7.0 REFERENCES

1. R. Adler, "Interaction between Light and Sound", IEEE Spectrum, May 1967, pp. 42-54.
2. D.L. Hecht, "Multifrequency Acousto optic Diffraction", Trans. on Sonics and Ultrasonics, Vol. SU-24, No. 1, January 1977, pp. 7-18.
3. D.L. Hecht, "Spectrum Analysis Using Acousto-Optic Devices", Optical Engineering, Vol. 16, No. 5, Sept./Oct. 1977, pp. 461-466.
4. M. King, W.R. Benneth, L.B. Lambert and M. Arm, "Real-Time Electro-optical Signal Processors with Coherent Detection", Applied Optics, Vol. 6, No. 8, August 1967, pp. 1367-1375.
5. W.R. Klein and B.D. Cook, "Unified Approach to Ultrasonic Light Diffraction", IEEE Trans. on Sonics and Ultrasonics, July 1967, p. 123.
6. W.T. Maloney, "Acousto optical Approaches to Radar Signal Processing", IEEE Spectrum, October 1969, pp. 40-48.

APPENDIX A

COMPUTER PROGRAM LISTING

```

.600 C      ' THIS PROGRAM IS WRITTEN TO CALCULATE THE INTENSITY DISTRIBUTION
.610 C      IN THE FOCAL PLANE FOR DIFFERENT TYPES OF SIGNALS WITH GAUSSIAN
.620 C      ILLUMINATION DISTRIBUTION AND ACOUSTIC LOSS '
.630 C
.640 C      F0 - CENTRE FREQUENCY OF SIGNAL
.650 C      T1 - TOTAL TRANSIT TIME
.660 C      ALAM - OPTICAL WAVELENGTH
.670 C      F - FOCAL LENGTH
.680 C      D - APERTURE WIDTH
.690 C      ALFA - ACOUSTIC LOSS COEFFICIENT
.700 C      TT - GAUSSIAN BEAM PROFILE CONSTANT
.710 C      AK - LINEAR FM CHANGING RATE
.720 C
.730 C
.740 C
.750 C
.760 C
.770 C
.780 C
.790 C
.800 C
.810 C
.820 C
.830 C
.840 C
.850 C
.860 C
.870 C
.880 C
.890 C
.900 C
.910 C
.920 C
.930 C
.940 C
.950 C
.960 C
.970 C
.980 C
.990 C
1.000 C      DIMENSION E1(222),E2(222),E3(222),V1(222), V2(222)
1.010 C      DIMENSION V3(222),V4(222),V5(222,50)
1.020 C      E1(1)=221.; E2(1)=221.; E3(1)=221.; V1(1)=221.
1.030 C      V4(1)=221.
1.040 C      DO 21 MM= 1,2
1.050 C      WRITE(2,11)
1.060 C      11 FORMAT(/, ' Y-POSITION(MM)          AMPLITUDE
1.070 C      1 INTENSITY          NORMALIZED INTENSITY')
1.080 C      F0=1.50E+6
1.090 C      T1= 1.0E-5 * 3.5
1.100 C      ALAM= 6.328E-7
1.110 C      F=.4
1.120 C      D=.041/2.
1.130 C      US=D/T1
1.140 C      ALFA =1./T1 * 3.5
1.150 C      C3= -ALFA*T1/D
1.160 C      TT=1.
1.170 C      C4= 2.* TT/D
1.180 C      PI=3.14159
1.190 C      AK= F0/T1*20.
1.200 C      C5= AK/(2.*US*US)*22.*PI
1.210 C      II=221
1.220 C      DO 10 I=1,II
1.230 C      V= F0*ALAM*F/US
1.240 C      VV= 1. -(1. /90.43 * ((II-I) /2 -(I-1)))
1.250 C      A =-D/2.
1.260 C      B =D/2. -D/4.*3.14*(MM-1)
1.270 C      C1= 2.*PI*F0/US
1.280 C      C2= -C1*VV
1.290 C      N=5
1.300 C      TOL=0.
1.310 C      KK=0
1.320 C      2 CALL GAUGUS (A,B,P1,X,TOL,N,KK)
1.330 C      KK=KK+1
1.340 C      IF(KK.LE.0) GO TO 3
1.350 C      P1 = COS(( C1+C2)*X +C5*X*X) *EXP(C3*X-(C4*X)*2)
1.360 C      GO TO 2
1.370 C      3 RE=P1
1.380 C      4 CALL GAUGUS (A,B,P2,X,TOL,N,KK)
1.390 C      KK=KK+1
1.400 C      IF(KK.LE.0) GO TO 5
1.410 C      P2= SIN(( C1+C2)*X +C5*X*X) *EXP(C3*X-(C4*X)*2)
1.420 C      GO TO 4
1.430 C      5 AIM=P2
1.440 C      AMP= SQRT(RESRE +AIM*AIM) *1000. *EXP((-ALFA*T1/2.)
1.450 C      AIM= AMP*AMP
1.460 C      V1(I+1) = VV*V*1000. +V*1000.*20.
1.470 C      V4(I+1) = V1(I+1)/1000. * ( US/(ALAM*F))

```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```

4.000      VB(I+1) = AIN
4.100      V3(I+1) = AMP
4.200
10      CONTINUE
4.300      DO 12 N=1, II
4.400      IF(N=2) 30,31,32
4.500      E1(N+1) = VB(N+1)/VB((II+3)/2)
4.600      A1 = VB((II+3)/2)
4.700      E1(N+1) = 10.8 LOG10(E1(N+1))
4.800      20      FORMAT(F18.6,F18.4,14X,BF20.4)
4.900      GO TO 33
5.000      31      E2(N+1) = 10.8 LOG10( VB(N+1)/A1)
5.100      GO TO 33
5.200      32      E3(N+1) = 10.8 LOG10( VB(N+1)/A1)
5.300      33      AB=1.
5.400      12      CONTINUE
5.500      21      CONTINUE
5.600      CALL INITT(100)
5.700      CALL BINITT
5.800      CALL CHECK(V1,E1)
5.900      CALL DISPLAY(V1,E1)
6.000      CALL CPlot(V1,E2)
6.100      CALL INITT(100)
6.200      CALL BINITT
6.300      CALL CHECK(V4,E1)
6.400      CALL DISPLAY(V4,E1)
6.500      CALL CPlot(V4,E2)
6.600      CALL FINITT(0.700)
6.700      STOP
6.800      END
6.900      SUBROUTINE GAUSS(DO,DB,FX,X,TOL,NM,K)
7.000      DIMENSION AB(30), AC(30), AD(4), A(S,B)
7.100      EQUIVALENCE(A(1,1),AB(1)), (A(7,4),AC(1)), (A(5,B
7.200      1),AD(1))
7.300      DATA AB/2., .2011941, .3041514, .5700782,
7.400      1 .7244177, .8482006, .9378734, .9870005,
7.500      1 .5555556, .8888889, .2304583, .4404000,
7.600      1 .6423493, .8015781, .9175884, .9841831,
7.700      1 .2300289, .4706287, .5688889, .3005438,
7.800      1 .5100061, .730152, .8370636, .9782227,
7.900      1 .120405, .2797054, .3818301, .4170502,
8.000      1 .3242534, .6133714/
8.100      DATA AC/ .8369311, .9681602, .8127430E-1,
8.200      1 .1000482, .2806107, .3123471, .3302304,
8.300      1 .4058452, .7415312, .9491079, .550057E-1
8.400      1, .1255804, .1062902, .2331938, .8620045,
8.500      1 .2720251, .5384693, .9061790, .4048401E-1,
8.600      1 .0021215, .1380735, .178146, .2078161,
8.700      1 .2262832, .2385516, .7745057, .3075324E-1,
8.800      1 .703000E-1, .1071502, .1305707/
8.900      DATA AD/ .1062002, .106161, .1004315, .2005782/
9.000      IF(TOL.LE.0.) TOL=1.E-4
9.100      K=K+1
9.200      IF(K=4) 400,303,001
9.300      400      IF(K=2) 601,301,302
9.400      601      SUM=0.0
9.500      IND=0
9.600      B=DD
9.700      S=DD
9.800      N=(NM+1)/2
9.900      600      CALC1 = .0000000E74
10.000      IT=0
10.100      12      SCL1 = (B-S)/2.
10.200      SCL2 = (B+S)/2.

```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```

58.000 13 X=SCL2
59.000 K=2
60.000 RETURN
61.000 303 F0=FX
62.000 J=N
63.000 21 CALC2=0.
64.000 I=1
65.000 M=9-J
66.000 IF(I.EQ.J) GO TO 3
67.000 22 L=9-I
68.000 X=A(L,M) *SCL1+SCL2
69.000 K=0
70.000 RETURN
71.000 301 TEMP =FX
72.000 X=(-A(L,M) ) *SCL1+SCL2
73.000 K=1
74.000 RETURN
75.000 302 CALC2=CALC2 +A(I,J)*TEMP*FX
76.000 I=I+1
77.000 IF(I.LT.J) GO TO 22
78.000 3 CALC2=CALC2 + A(I,I) *F0
79.000 CALC2 =CALC2*SCL1
80.000 IF(IT.NE.0) GO TO 8
81.000 7 IF(ABS(CALC1).GT.1.) GO TO 1111
82.000 IF(ABS(CALC1-CALC2) .LT.TOL) GO TO 5
83.000 GO TO 6
84.000 1111 IF(ABS((CALC1-CALC2)/CALC1) .LT. TOL) GO TO 5
85.000 6 CALC1=CALC2
86.000 J=J+1
87.000 IF(J=8) 21,21,11
88.000 8 FHALF=FHALF +CALC2
89.000 IF(IT.NE.1) GO TO 15
90.000 SAVE=FHALF
91.000 SCL1=(PREND-B)/2.
92.000 SCL2=(PREND+B)/2.
93.000 IT=2
94.000 GO TO 13
95.000 15 IF(ABS((FHALF-CALC1)/RERR).LT.TOL) GO TO 16
96.000 CALC1 =SAVE
97.000 GO TO 110
98.000 16 SUM= SUM+FHALF
99.000 IF (PREND.GE.RHEND) GO TO 114
100.000 D=PREND
101.000 B=RHEND
102.000 IND=1
103.000 N=8
104.000 FHALF =0.0
105.000 GO TO 600
106.000 114 CALC2 =SUM
107.000 5 FX=CALC2
108.000 K=-1
109.000 RETURN
110.000 11 IF(IND.GT.0) GO TO 110
111.000 RERR =CALC2
112.000 RHEND =B
113.000 N=8
114.000 110 PREND =B
115.000 B=(B+D) /2.
116.000 IT=1
117.000 FHALF=0.0
118.000 GO TO 12
119.000 END

```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

AD-A083 900

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall document is classified)		
1. ORIGINATING ACTIVITY Defence Research Establishment Ottawa, National Defence Headquarters, Ottawa, Ontario, K1A 0Z4		2a. DOCUMENT SECURITY CLASSIFICATION UNCLASSIFIED
		2b. GROUP IV
3. DOCUMENT TITLE SIGNAL ANALYSIS USING THE ACOUSTO-OPTIC SPECTRUM ANALYZER (U)		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) TECHNICAL NOTE		
5. AUTHOR(S) (Last name, first name, middle initial) LEE, Jim P.		
6. DOCUMENT DATE NOVEMBER 1979	7a. TOTAL NO. OF PAGES 31	7b. NO. OF REFS 6
8a. PROJECT OR GRANT NO. DREO 31B00	9a. ORIGINATOR'S DOCUMENT NUMBER(S) 80-2	
8b. CONTRACT NO.	9b. OTHER DOCUMENT NO.(S) (Any other numbers that may be assigned this document)	
10. DISTRIBUTION STATEMENT QUALIFIED REQUESTERS MAY OBTAIN COPIES OF THIS DOCUMENT FROM THEIR DEFENCE DOCUMENTATION CENTRE		
11. SUPPLEMENTARY NOTES	12. SPONSORING ACTIVITY DND/DMCS-6	
13. ABSTRACT (UNCLASSIFIED) This paper examines the instantaneous, Fourier power spectrum for different types of input signals such as CW, pulse modulated CW and linear FM signals using the acousto-optic spectrum analyzer. The effect on the time-integrated output intensity distribution due to the truncation of the propagating acoustic signal by the finite aperture width of the Bragg cell is also analyzed. Some experimental results on pulse-modulated CW and linear FM signals are presented, and then compared with theory.		

UNCLASSIFIED

Security Classification

KEY WORDS**ELECTRONIC SUPPORT MEASURES****ACOUSTO-OPTICS****EW RECEIVERS****SPECTRUM ANALYSIS****INSTRUCTIONS**

1. **ORIGINATING ACTIVITY** Enter the name and address of the organization issuing the document.
- 2a. **DOCUMENT SECURITY CLASSIFICATION** Enter the overall security classification of the document including special warning terms whenever applicable.
- 2b. **GROUP** Enter security reclassification group number. The three groups are defined in Appendix 'M' of the DRB Security Regulations.
3. **DOCUMENT TITLE** Enter the complete document title in all capital letters. Titles in all cases should be unclassified. If a sufficiently descriptive title cannot be selected without classification, show title classification with the usual one-capital-letter abbreviation in parentheses immediately following the title.
4. **DESCRIPTIVE NOTES** Enter the category of document, e.g. technical report, technical note or technical letter. If appropriate, enter the type of document, e.g. interim, progress, summary, annual or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S)** Enter the name(s) of author(s) as shown on or in the document. Enter last name, first name, middle initial. If military, show rank. The name of the principal author is an absolute minimum requirement.
6. **DOCUMENT DATE** Enter the date (month, year) of Establishment approval for publication of the document.
- 7a. **TOTAL NUMBER OF PAGES** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES** Enter the total number of references cited in the document.
- 8a. **PROJECT OR GRANT NUMBER** If appropriate, enter the applicable research and development project or grant number under which the document was written.
- 8b. **CONTRACT NUMBER** If appropriate, enter the applicable number under which the document was written.
- 9a. **ORIGINATOR'S DOCUMENT NUMBER(S)** Enter the official document number by which the document will be identified and controlled by the originating activity. This number must be unique to this document.
- 9b. **OTHER DOCUMENT NUMBER(S)** If the document has been assigned any other document numbers (either by the originator or by the sponsor), also enter this number(s).
10. **DISTRIBUTION STATEMENT** Enter any limitations on further dissemination of the document, other than those imposed by security classification, using standard statements such as:
 - (1) "Qualified requesters may obtain copies of this document from their defence documentation center."
 - (2) "Announcement and dissemination of this document is not authorized without prior approval from originating activity."
11. **SUPPLEMENTARY NOTES** Use for additional explanatory notes.
12. **SPONSORING ACTIVITY** Enter the name of the departmental project office or laboratory sponsoring the research and development. Include address.
13. **ABSTRACT** Enter an abstract giving a brief and factual summary of the document, even though it may also appear elsewhere in the body of the document itself. It is highly desirable that the abstract of classified documents be unclassified. Each paragraph of the abstract shall end with an indication of the security classification of the information in the paragraph (unless the document itself is unclassified) represented as (TS), (S), (C), (R), or (U).

The length of the abstract should be limited to 20 single-spaced standard typewritten lines, 7 1/2 inches long.
14. **KEY WORDS** Key words are technically meaningful terms or short phrases that characterize a document and could be helpful in cataloging the document. Key words should be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context.